


1

- ## REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE FOR MANUFACTURING		
A	Updated sheet format, corrected title block and revision block author information, changed Radius from 0.155+/-0.035" to 0.10+/-0.05", changed OAH from 0.31" to 0.53".	MAR2019	R.DAVIS
B	Added note referencing pressurized lids.	3NOV2023	C. FANKHAUSER

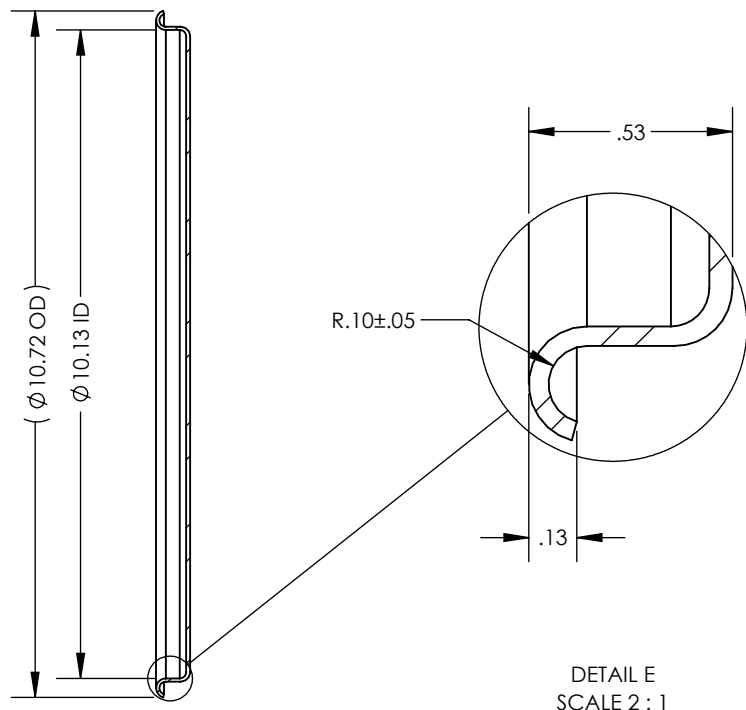

SECTION A-A



DETAIL E  
SCALE 2 : 1

UNLESS OTHERWISE SPECIFIED:

1. DO NOT SCALE DRAWING
2. DIMENSIONS ARE IN INCHES
3. TOLERANCE:  
FRACTIONAL  $\pm .25$   
X.X  $\pm .1$   
X.XX  $\pm .03$   
X.XXX  $\pm .010$   
ANGULAR:  $\pm 2$  DEG.
4. INTERPRET DRAWING PER  
ASME-Y14.5M-1994 STANDARDS
5. THIRD ANGLE PROJECTION
6. REMOVE BURRS & BREAK ALL  
SHARP EDGES WITH R0.03  $\pm 0.02$

	NAME	DATE
DRAWN	R.DAVIS	MAR2019
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED WITHIN THIS DRAWING IS THE SOLE PROPERTY OF TOLEDO METAL SPINNING COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION OF TOLEDO METAL SPINNING COMPANY IS PROHIBITED.

TITLE:

TMS 316SS BEADED LID

SIZE <b>A</b>	DRAWING NUMBER <b>TMSL916-316SS-BEADED</b>		REV <b>B</b>
SCALE: 1:3	WEIGHT: 1.72	SHEET 1 OF 1	